



Blade Series Install Tips

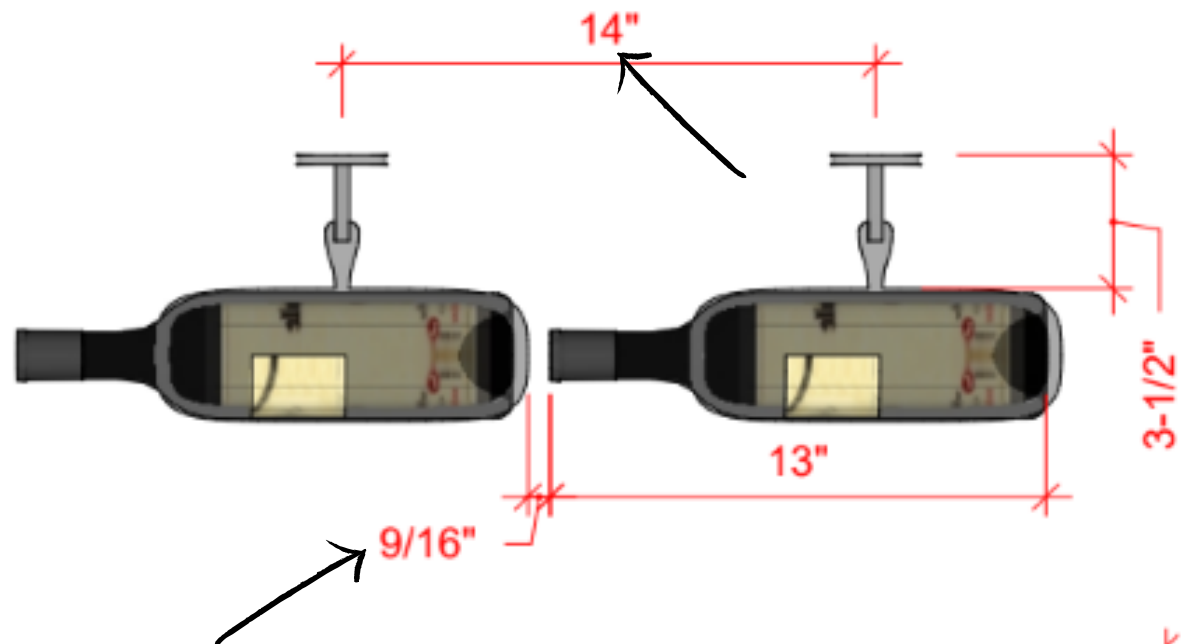



recommended min. spacing

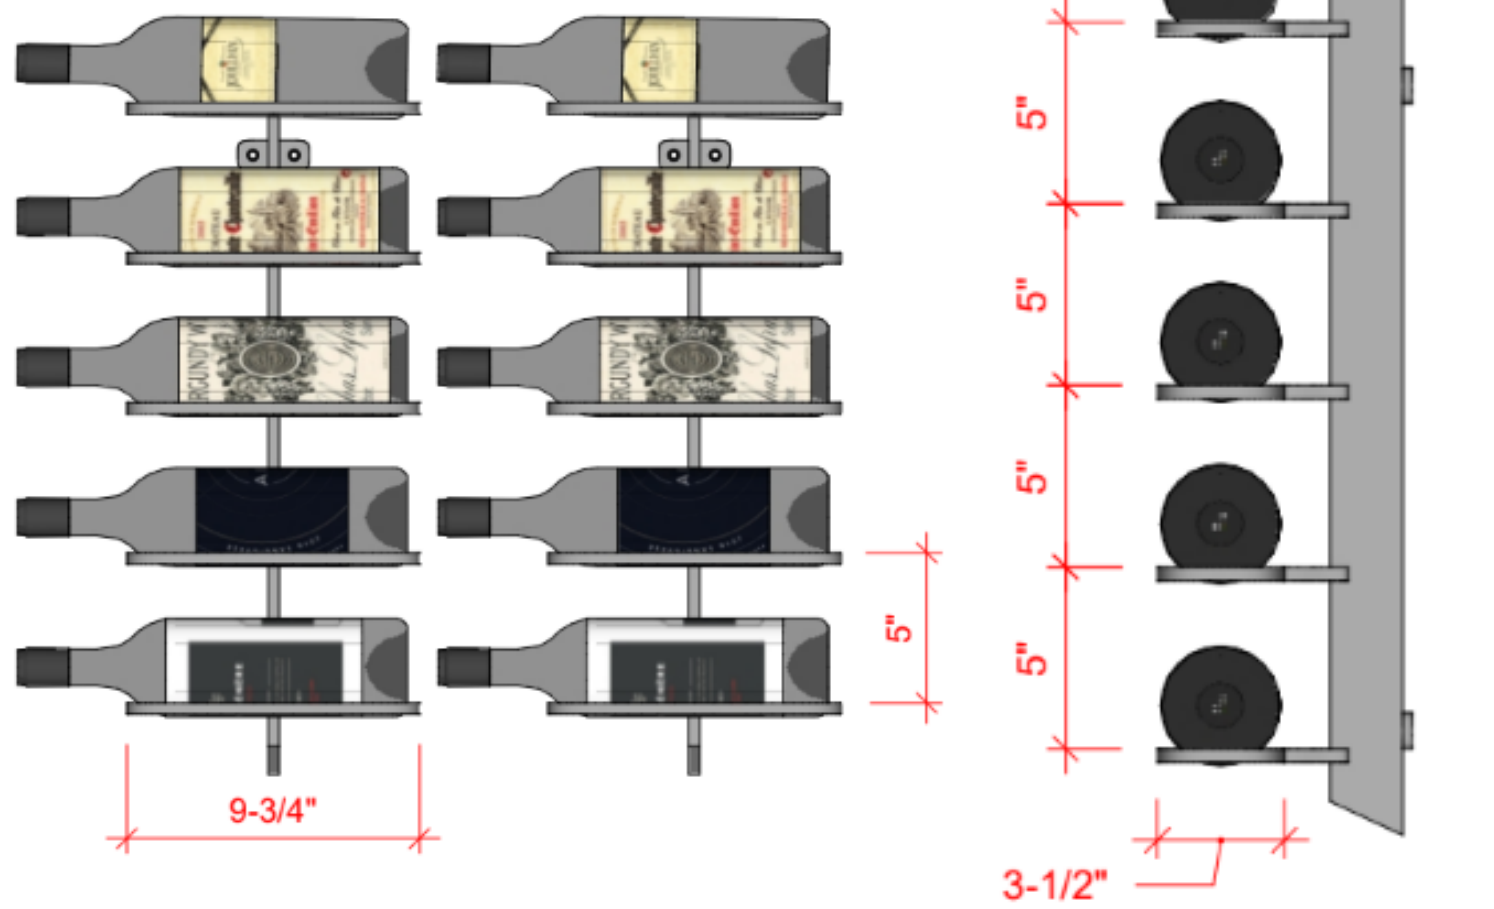

You'll need the following tools and hardware...

- Drill
- Bubble Levels / 4' for 2 racks or more
- Laser level helps if you have one
- Toggle lock anchors for sheet-rock
- Tap-cons for stone, rock or brick
- Wood screws for wood walls or studs



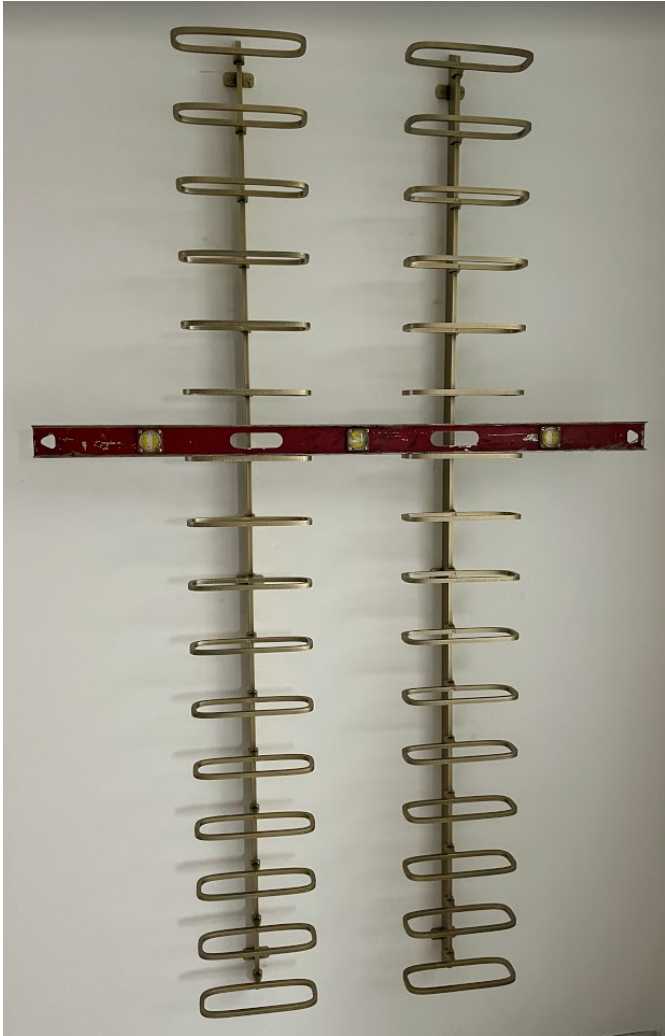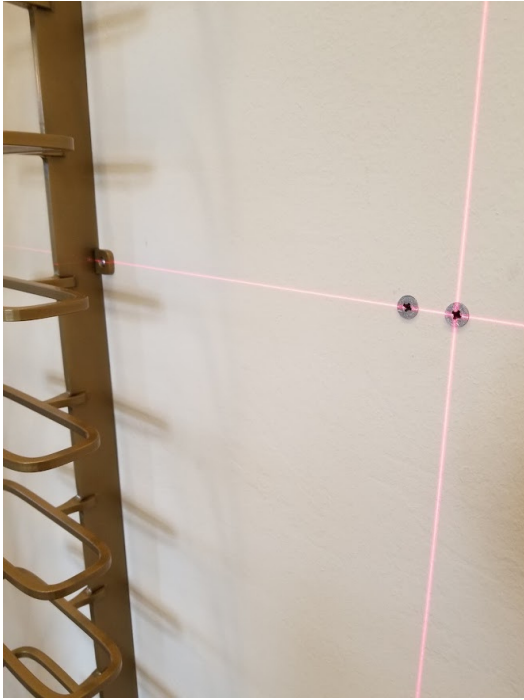

- Measure the wall and center/install the middle rack first.
- Use your 4' level to make sure it's straight on the wall.
- Use a laser level if you have one to assist in keeping the rack straight.
- For sheet-rock, mark your holes, then install toggle-locks.
- Use the 4' level to install the next racks in order to keep them in line with one another. A laser level helps here as well.

Notes:

- If you've never used Toggle-locks or Tap-cons before, be sure and watch a You-Tube video first on proper installation. It's crucial that you get your holes marked and drilled perfectly on the first try. If you aren't confident, hire a professional to install your blades.
- 14" on center is just the recommended minimum spacing between the racks spine. You can of course mount them wider than that if you'd like.
- It's best to plan out your spacing on the floor before you start to mark and mount on the walls.